

## Important Information

- Product must be installed in accordance with the current regulations and electrical codes in the country of installation and all wiring must be done by a qualified electrician.
- These products are designed for connection to a 100-305VAC 50/60Hz supply.
- Any broken or damaged parts should be replaced as soon as possible.
- Luxtronik will not accept responsibility for any claims arising from a poor installation

## Important User Safety Advice

- Make sure to observe and follow all necessary health and safety precautions when installing.
- Always disconnect power before installation or servicing

## Kit Contents

(1) Luminaire, (2) Suspension kit

## SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

### Luminaire Suspension Mount Assembly

1. Check you have all the tools and accessories required to complete the installation correctly.
2. The luminaire comes with a chain mounting suspension kit
3. Fix luminaire to a suitable chain/suspension cord (not supplied) for the application according to separation of ceiling locations in Fig. 1.
4. Once mounted, adjust the luminaire to desired height
6. Connect the mains input cable as indicated in below diagram using a suitable connector /connection box to maintain the IP rating for the location.
7. Turn on power supply and test for correct operation.


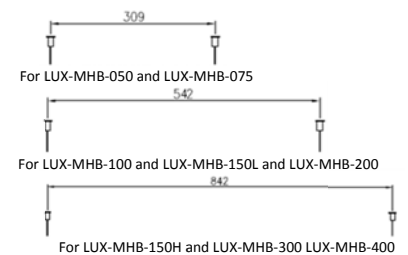


Fig. 1 Separation of ceiling suspension locations

### Electrical Connections

#### 100-305VAC 50/60Hz / Class I

Note: Class I products must always be Earthed/Grounded



## Dimming

If you wish to dim this fitting, please ensure that you have purchased the dimmable model. Connect the supply dimming positive wire to the positive (+) terminal, connect the supply dimming negative wire to the negative (-) terminal. If dimming is not required, ensure to isolate the supply dimming cables.